




TECHNICAL SPECIFICATIONS | TRACK-MOUNTED SCREENING PLANT

# MOBISCREEN MS 12 Z



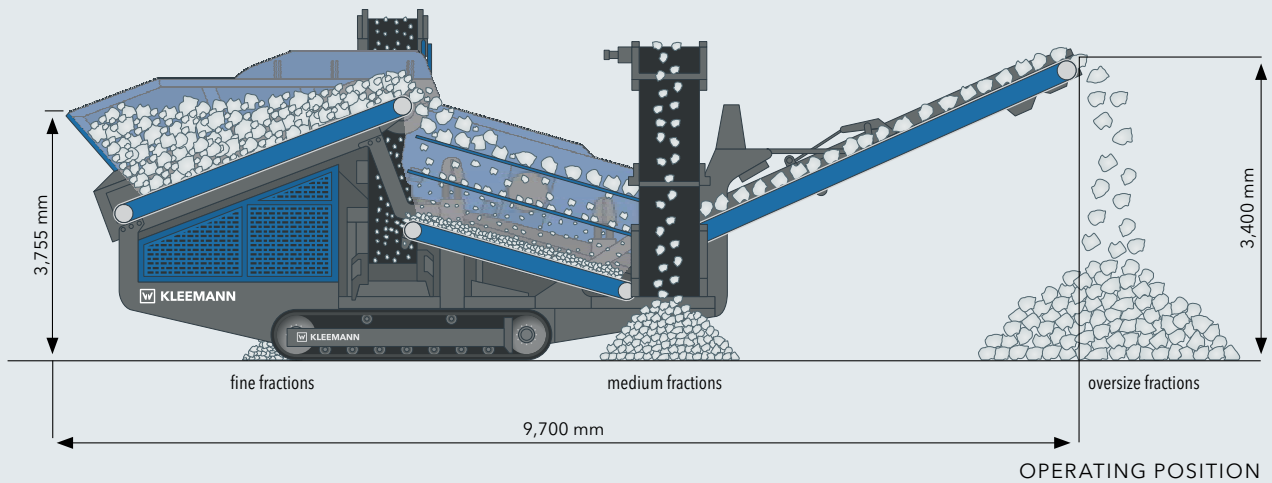

## TECHNICAL HIGHLIGHTS

- ▣ Double-deck screening unit
- ▣ Diesel-hydraulic drive
- ▣ Scalping screen
- ▣ Max. feed size: 300 mm

## TECHNICAL SPECIFICATIONS MS 12 Z

### Feeding unit

Feed capacity up to approx. (t/h)	200
Feed size max. (mm)	300
Feed height (mm)	3,755
Hopper capacity (m³)	4

### Belt conveyor feeder

Width x length (mm)	1,200 x 3,200
Type (optional)	variable speed

### Screening unit

Type	double-deck vibration screen
Top deck width x length (mm)	1,220 x 2,750
Bottom deck width x length (mm)	1,220 x 2,590

### Belt conveyor underflow material

Width x length (mm)	1,050 x 2,200
---------------------	---------------

### Bottom deck underflow discharge conveyor (fine fractions)

Width x length (mm)	650 x 7,000
Discharge height approx. (mm)	3,500

### Bottom deck overflow discharge conveyor (medium fractions)

Width x length (mm)	1,400 x 2,600
Discharge height approx. (mm)	3,500

### Top deck overflow discharge conveyor (oversize fractions)

Width x length (mm)	1,050 x 4,600
Discharge height approx. (mm)	3,400

### Drive

Drive concept	diesel-hydraulic
Powerpack CAT (Tier 3, 4f) (kW)	95

### Transport

Transport height approx. (mm)	3,200
Transport length approx. (mm)	9,700
Transport width approx. (mm)	2,500
Transport weight approx. (kg)	15,500